


SERIES 8 FLANGED PISTON TYPE SAMPLING VALVES

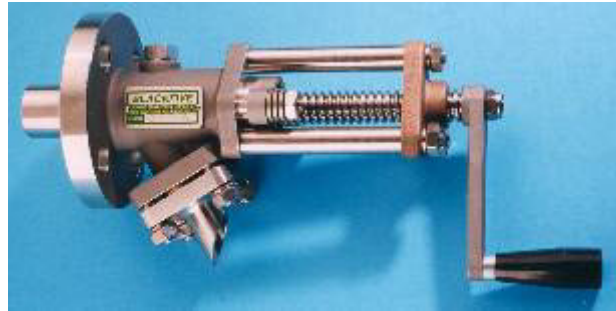

INTRODUCTION

The Series 8 valves have been developed to provide a flanged version for working at higher pressures of the standard Blackfive piston type sample valves.

INSTALLATION

The valves can be installed and used on the side or base of vessels or pipelines with ASA 300 flanges to BS 1560 (ANSI B16.5) with ASA 600 flanges optional.

A range of accessories are available to collect the samples into safety sample bottles.

A firesafe version of the valve is also available.

OPERATION

Opening and closing of the valve is by a simple crank handle with the last turn of the handle applying pressure to the chevron seals to guarantee a leak free valve.

VALVE MODELS AVAILABLE

PISTON SIZE	MODEL NUMBER
10 mm	8S10A
15 mm	8S15A
20 mm	8S20A
25 mm	8S25A
ALL VALVES ARE F316 SS WITH PTFE SEALS	

D166



Blackfive Engineering Limited

16 Beeston Court, Manor Park,
Runcorn, Cheshire, WA7 1SS,

Tel + 44 (0)1928 579140
Fax + 44 (0)1928 579514